

# 502



## »» Features

- Wide switching capacity of 10  $\mu$  A to 2A.
- Sensitivity coil : 0.22W.
- High dielectric strength coil-contacts: 1000VAC, open contacts: 750VAC.
- Conforms to FCC part 68 requirements.
- Ag+Au clad bifurcated crossbar contacts and fully sealed for high contact reliability.
- Comply with RoHS-Directive 2002/95/EC.

## »» Type List

Terminal style	Contact form	Coil sensitivity	Enclosure style
			Plastics sealed
PCB terminal	2C (DPDT)	Standard type	502-2C-S
		High sensitivity type	502N-2C-S
		Ultra-sensitivity type	502N1-2C-S

## »» Ordering Information

502 N - 2C - S  
1 2 3 4

- |                                    |                                   |
|------------------------------------|-----------------------------------|
| 1. 502 -- Basic series designation | 3. 2C -- Double pole double throw |
| 2. Blank -- Standard type          | 4. S -- Plastics sealed           |
| N -- High sensitivity type         |                                   |
| N1 -- Ultra-sensitivity type       |                                   |

## »» Contact Rating

Number of contacts and type	2 changeover contacts	
Contact assembly	Bifurcated crossbar	
Contact material	Ag + Au-clad	
Max. continuous current	2A	
Maximum switching current	2A / standard type	
	1A / high sensitivity & Ultra-sensitivity type	
Maximum switching voltage	125VAC	
	125VDC	
Maximum switching capacity	DC voltage	60W / standard type
		24W / high sensitivity & Ultra-sensitivity type
	AC voltage	62.5VA
Min. permissible load <sup>(1)</sup>	10 $\mu$ A at 10mVDC	
Contact resistance (initial value)	$\leq$ 100 m $\Omega$	

Note : (1) P level:  $\lambda_{60} = 0.1 \times 10^{-6}$ / operation

## »» Coil Rating (DC)

## ◆ Standard Type

Rated voltage (V)	Rated current $\pm 10\%$ at 23°C (mA)	Coil resistance $\pm 10\%$ at 23°C ( $\Omega$ )	Max. continuous voltage at 23°C	Pick up voltage(Max) at 23°C	Drop out voltage(Min) at 23°C	Power consumption at rated voltage
3	166.7	18	120 % of rated voltage	75 % of rated voltage	5 % of rated voltage	approx. 0.5W
5	100	50				
6	83.3	72				
9	55.6	162				
12	41.7	288				
24	20.8	1152	110 % of rated voltage			approx. 0.58W
48	12	4000				

## ◆ High Sensitivity Type

Rated voltage (V)	Rated current $\pm 10\%$ at 23°C (mA)	Coil resistance $\pm 10\%$ at 23°C ( $\Omega$ )	Max. continuous voltage at 23°C	Pick up voltage(Max) at 23°C	Drop out voltage(Min) at 23°C	Power consumption at rated voltage
3	120	25	140 % of rated voltage	75 % of rated voltage	5 % of rated voltage	approx. 0.36W
5	72	70				
6	60	100				
9	40	225				
12	30	400				
24	15	1600				
48	7.5	6400				

## ◆ Ultra-sensitivity Type

Rated voltage (V)	Rated current $\pm 10\%$ at 23°C (mA)	Coil resistance $\pm 10\%$ at 23°C ( $\Omega$ )	Max. continuous voltage at 23°C	Pick up voltage(Max) at 23°C	Drop out voltage(Min) at 23°C	Power consumption at rated voltage
3	50	60	180 % of rated voltage	75 % of rated voltage	5 % of rated voltage	approx. 0.15W
5	30	166.7				
6	25	240				
9	16.7	540				
12	12.5	960				
24	8.3	2880	150 % of rated voltage			approx. 0.2W
48	6.25	7680				

# 502

## »» Specification

Contact resistance <sup>(1)</sup>	50 mΩ Max. / standard type & high sensitivity type	
	100 mΩ Max. / Ultra-sensitivity type	
Operate time <sup>(1)</sup>	7 ms max.	
Release time <sup>(1)</sup>	3 ms max.	
Bounce time	operate	approx. 0.5ms
	release	approx. 3.5ms
Insulation resistance <sup>(1)</sup>	1000 MΩ Min. (DC 500V)	
Surge withstand voltage	1500V 10 X 160 μs (conforms to part 68 of FCC rules)	
Dielectric strength <sup>(1)</sup>	Between open contact	: AC 1000V, 50/60Hz 1 min.
	Between contacts of different poles	: AC 1000V, 50/60Hz 1 min.
	Between contact of same poles	: AC 750V, 50/60Hz 1 min.
		: AC 500V, 50/60Hz 1 min. for Ultra-sensitivity type
Vibration resistance	Operating extremes	10 ~ 55Hz , amplitude 1.5 mm
	Damage limits	10 ~ 55Hz , amplitude 1.5 mm
Shock resistance	Operating extremes	20G
	Damage limits	100G
Life expectancy	Mechanical	15,000,000 operations (frequency 36,000 operations/hr)
	Electrical	AC 100,000 operations / DC 300,000 operations (frequency 1,800 operations/hr)
Operating ambient temperature	-25 ~ +70°C (no freezing)	
	-25 ~ +65°C (no freezing) for standard coil	
Weight	Approx. 6 g	

Note : (1) initial value


## »» Safety Approval

Certified	UL	CSA
File No.	E74321	218083

## »» Safety Approval Rating


Standard 、 high sensitivity type	Ultra-sensitivity type
0.6A 125VAC	0.5A 125VAC
0.6A 110VDC	0.2A 110VDC
2A 30VDC	1A 24VDC

## »» Outline Dimensions

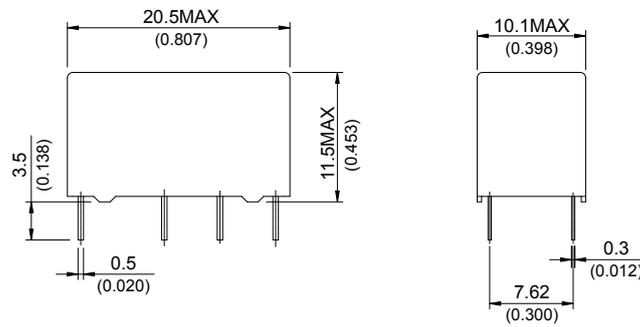


## »» Wiring Diagram

BOTTOM VIEW






## »» PC Board Layout




BOTTOM VIEW

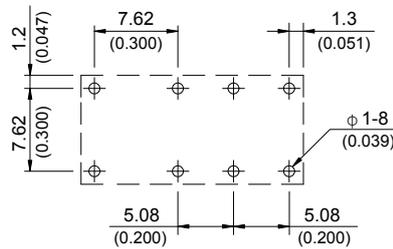


## »» Engineering Data

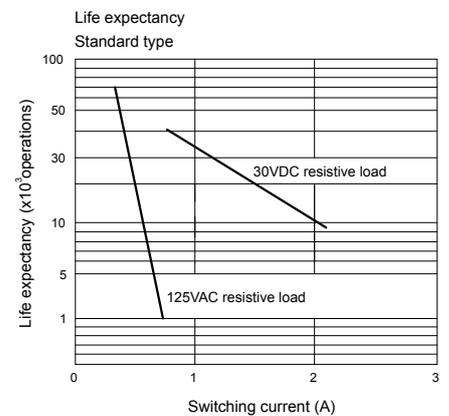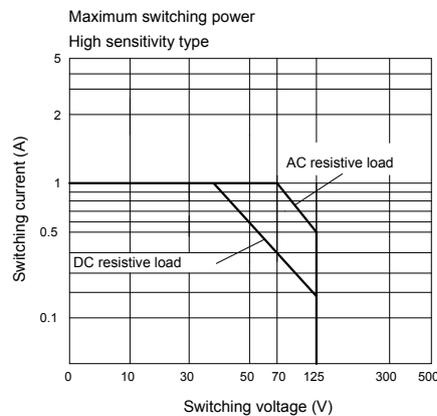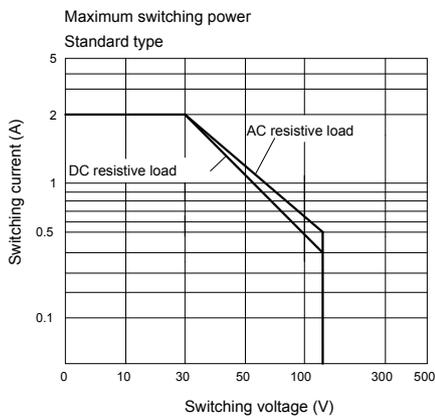

# 502

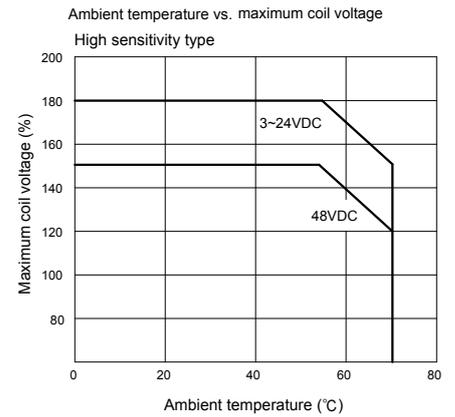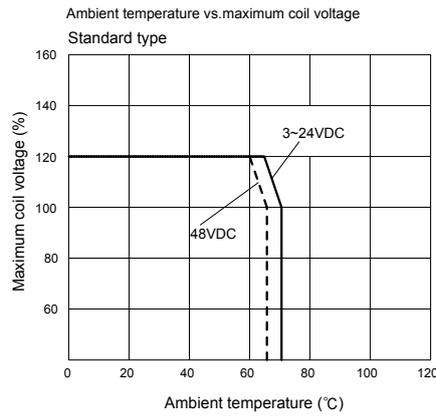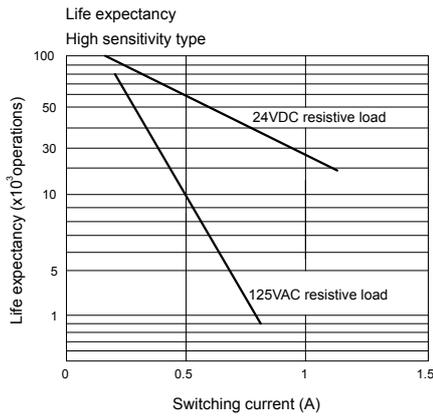

High-frequency characteristics  
measurement conditions

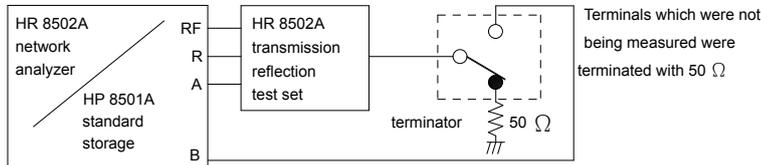

Notes: The high-frequency characteristics data were measured using a dedicated circuit board and actual values will vary depending on the usage conditions. Check the characteristics of the actual equipment used.

